



FASTENING AND CONNECTING ELEMENTS

Beam clamp KLM

KLM (A, C, MG, MF, MH, DMF, DMFH, DMH)

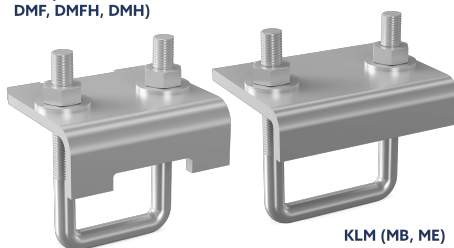


KLM (MB, ME)

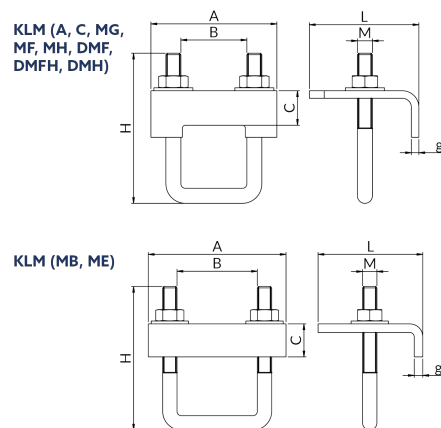

- **Corrosion protection:** galvanic zinc coating
- **Application:** joining mounting profiles to steel girders; creating solid fastenings on steel girder structures without the need for drilling or welding; secure fastening using two clamps per fastening; integrated set adapted to steel girders, such as channel sections and I-beams.

● Installation instructions:

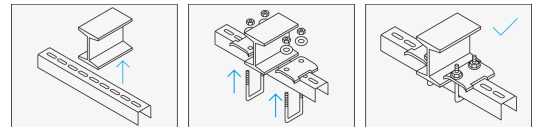

For profiles	Dimensions A [mm]	Dimensions L [mm]	Dimensions C [mm]	Dimensions B [mm]	Dimensions H [mm]	Dimensions M [mm]	Permissible load [kN]	Unit weight [kg]	Quantity in package	Order designation	Catalog number
A, C, W, X	66	66	23	32	96	M8	6	0.384	4	KLMA	81310303000
MG, MF, MK, BFMF	84	73	23	44	100	M10	8	0.46	4	KLMMF	81310414100
MH, MO	84	73	23	44	120	M10	8	0.516	4	KLMMH	81310416200
MB	96	73	23	56	100	M10	8.5	0.52	4	KLMMB	81310504000
ME	96	73	23	56	130	M10	8.5	0.588	4	KLMME	81310508000
MI, DMF, DMFH	84	73	23	44	150	M10	8	0.564	4	KLMMFHD	81310410300
DMH	84	73	23	44	180	M10	8	0.556	4	KLMMHD	81310412400

Approvals EN-ITB-KOT-2020_1562 wydanie 2 > Declarations EN-KDWU 05_2025